



# ICEIS

# 2004

## ***SIXTH INTERNATIONAL CONFERENCE ON ENTERPRISE INFORMATION SYSTEMS***

# PROCEEDINGS

### **Volume 1**

PORTO, PORTUGAL · APRIL 14-17, 2004

HOSTED BY

UNIVERSIDADE  
PORTUCALENSE

ORGANIZED BY

INSTICC  
INSTITUTE FOR SYSTEMS and  
TECHNOLOGIES OF INFORMATION,  
CONTROL and COMMUNICATION

IN COLLABORATION WITH

ACM, AAAI, IEICE and  
APPIA

# ICEIS 2004

Proceedings of the  
Sixth International Conference on  
Enterprise Information Systems

Volume 1

Porto, PORTUGAL

April 14 – 17, 2004

Organized by  
INSTICC - Institute for Systems and Technologies of  
Information, Control and Communication  
Co-organised and Hosted by  
Portucalense University

in collaboration with AAI. ACM. IEICE and APPIA

Copyright © INSTICC - Institute for Systems and Technologies of  
Information, Control and Communication  
All rights reserved

Edited by Isabel Seruca, Joaquim Filipe, Slimane Hammoudi and José Cordeiro

Printed in Portugal

ISBN:972-8865-00-7

<http://www.iceis.org>  
[secretariat@iceis.org](mailto:secretariat@iceis.org)

---

# CONTENTS

## INVITED SPEAKERS

### KEYNOTE LECTURES

- ENGAGING STAKEHOLDERS IN THE DEFINITION OF STRATEGIC REQUIREMENTS IS-3  
*PERICLES LOUCOPOULOS*
- LARGE SCALE REQUIREMENTS ENGINEERING IN ACTION: AN ETHNOGRAPHIC ANALYSIS OF  
FUNCTIONAL AND POLITICAL ECOLOGIES IN SITU IN SPACE MISSION PROGRAMS IS-5  
*KALLE LYYTINEN*
- EVOLUTIONARY PROJECT MANAGEMENT: MULTIPLE PERFORMANCE, QUALITY AND COST  
METRICS FOR EARLY AND CONTINUOUS STAKEHOLDER VALUE DELIVERY IS-7  
*TOM GILB*
- MANAGING COMPLEXITY OF ENTERPRISE INFORMATION SYSTEMS IS-9  
*LESZEK MACIASZEK*
- ORGANIZATIONAL PATTERNS: BEYOND TECHNOLOGY TO PEOPLE IS-15  
*JAMES COPLIEN*
- COLLABORATION @ WORK: 3RD WAVE OF INTERNET TO FOSTER COLLABORATION  
BETWEEN INDIVIDUALS ON THE SEEM IS-17  
*ISIDRO LASO*

### TUTORIALS

- COMPETITIVE ENGINEERING: A TOTALLY METRICS-BASED SYSTEM-DEVELOPMENT METHOD IS-31  
*TOM GILB*
- MODEL CHECKING AND THEOREM PROVING-BASED VERIFICATION OF EIS IS-33  
*JUAN CARLOS AUGUSTO*
- FROM COMPONENTS TO WEB BASED SERVICES IS-35  
*BALBIR S. BARN*

## VOL. I - DATABASES AND INFORMATION SYSTEMS INTEGRATION

AUTOMATIC DISCOVERY OF SEMANTIC RELATIONSHIPS BETWEEN SCHEMA ELEMENTS <i>Nikos Rizopoulos</i>	3
SEMANTIC INTEGRATION OF DISPARATE DATA SOURCES IN THE COG PROJECT <i>Jos de Bruijn</i>	9
REFERENCIAL INTEGRITY MODEL FOR XML DATA INTEGRATED FROM HETEROGENEOUS DATABASES SYSTEMS - USING THE POWER OF XML FOR CONSISTENT DATA INTEGRATION <i>Mauri Ferrandin and Murilo S. de Camargo</i>	15
DEVELOPING A CORPORATE INFORMATION SYSTEM ARCHITECTURE: THE CASE OF EUROSTAT <i>Georges Pongas and François Vernadat</i>	21
FACILITATING BUSINESS PROCESS MANAGEMENT WITH HARMONIZED MESSAGING <i>Shazja Sadiq, Maria Orłowska, Wasim Sadiq and Karsten Schulz</i>	30
CONNECTIVITY OF ERP SYSTEM <i>Vatcharaporn Esichaikeul and Piyanan Nuankhieo</i>	37
ORGANIZATIONAL AND TECHNOLOGICAL CRITICAL SUCCESS FACTORS BEHAVIOR ALONG THE ERP IMPLEMENTATION PHASES <i>José Esteves and Joan A. Pastor</i>	45
MEMORY MANAGEMENT FOR LARGE SCALE DATA STREAM RECORDERS <i>Kun Fu and Roger Zimmermann</i>	54
ARCO: MOVING DIGITAL LIBRARY STORAGE TO GRID COMPUTING <i>Han-fei, Nuno Almeida, Miguel Loureno, Paulo Trezentos, Jos Borbinha and Joo Neves</i>	64
INTEGRATION, FLEXIBILITY AND TRANSVERSALITY: ESSENTIAL CHARACTERISTICS OF ERP SYSTEMS <i>Sylvestre Uwizemungu and Louis Raymond</i>	70
ERP BASED BUSINESS PROCESS REENGINEERING IN A HUMAN RESOURCES DEPARTMENT: A CASE STUDY APPROACH <i>Konstantinos Chertouras and Theodora Chatzikallia</i>	78
IMPORTANT FACTORS IN ERP SYSTEMS IMPLEMENTATIONS: RESULT OF THE RESEARCH IN POLISH ENTERPRISES <i>Piotr Soja</i>	84
DYNAMIC CHANGE OF SERVER ASSIGNMENTS IN DISTRIBUTED WORKFLOW MANAGEMENT SYSTEMS <i>Thomas Bauer and Manfred Reichert</i>	91
A MIDDLEWARE FOR THE MANAGEMENT OF LARGE UTILITIES PLANTS <i>Salvatore Cavaliere, Fabrizio D'Urso, Carmelo Floridia and Andrea Rossetini</i>	99

TOWARDS DESIGN RATIONALES OF SOFTWARE CONFEDERATIONS <i>Jaroslav Král and Michal Zemlicka</i>	105
PROPOSAL FOR AUTOMATING THE GENERATION PROCESS OF QUESTIONNAIRES TO MEASURE THE SATISFACTION LEVEL OF SOFTWARE USERS <i>Mauro Paparo, Sergio Zapata and María Inés Lund</i>	113
AN ALTERNATIVE APPROACH FOR BUILDING WEB-APPLICATIONS <i>Oleg Rostanin</i>	119
A RESPONSIBILITY-DRIVEN ARCHITECTURE FOR MOBILE ENTERPRISE APPLICATIONS <i>Qusay Mahmoud</i>	125
THE ABORTION RATE OF LAZY REPLICATION PROTOCOLS FOR DISTRIBUTED DATABASES <i>Luis Irán-Briz, Francesc Muñoz-Escoi and Josep Bernabéu-Aubán</i>	130
AN APPROACH FOR SCHEMA EVOLUTION IN ODMG DATABASES <i>Cecilia Delgado Negrete, José Samos and Manuel Torres</i>	136
KEYS GRAPH - BASED RELATIONAL TO XML TRANSLATION ALGORITHM <i>Wilmondes Manzi de Arantes Junior and Christine Verdier</i>	142
HEALTH CARE PROCESS BASED ON THE ABC MODEL THROUGH A META-STRUCTURED INFORMATION SYSTEM <i>Christine Verdier and Gérard Cluze</i>	149
DELEGATING AUTHORITY IN A DISTRIBUTED INFORMATION MANAGEMENT SYSTEM <i>Kareem S. Aggour, Barbara J. Vivier and Janet A. Barnett</i>	155
AN EFFICIENT B+-TREE IMPLEMENTATION IN C++ USING THE STL STYLE <i>Jingcun Zhou, Bin Nie and Gregory Butler</i>	163
TOWARDS CONCEPTUAL MEDIATION: A SEMANTIC ARCHITECTURE FOR DYNAMIC INTEGRATION OF HETEROGENEOUS DATABASES <i>Ismael Navas D. and José F. Aldana M.</i>	169
IMPROVING VIEW SELECTION IN QUERY REWRITING USING DOMAIN SEMANTICS <i>Qingyan Bai, Jun Hong and Michael F. McTear</i>	177
WEB-BASED TRAINING SYSTEM FOR FOREST FIRE OFFICE STAFF <i>Agustin Yague, Pedro P. Alarcón, Juan Garbajosa, Alexei Lisounkin and Gerhard Schreck</i>	184
ACME-DB: AN ADAPTIVE CACHING MECHANISM USING MULTIPLE EXPERTS FOR DATABASE BUFFERS <i>Faizal Riaz-ud-Din and Markus Kirchberg</i>	192
TRANSFORMATION-ORIENTED MIDDLEWARE FOR LEGACY SYSTEM INTEGRATION <i>Guido Menkehaus and Urs Frei</i>	202
CONV2XML: RELATIONAL SCHEMA CONVERSION TO XML NESTED-BASED SCHEMA <i>Angela C. Duta, Ken Barker and Reda Albaji</i>	210

CONVERTING LEGACY RELATIONAL DATABASE INTO XML DATABASE THROUGH REVERSE ENGINEERING <i>Chunyan Wang, Anthony Lo, Reda Alhaji and Ken Barker</i>	216
TRANSACTION DESIGN FOR DATABASES WITH HIGH PERFORMANCE AND AVAILABILITY <i>Lars Frank</i>	222
CONTEXTS FOR ORGANIZATIONAL INFORMATION SYSTEM DESIGN AND IMPLEMENTATION <i>Salvador Abreu and Daniel Diaz</i>	227
ENHANCING THE SUCCESS RATIO OF DISTRIBUTED REAL-TIME NESTED TRANSACTIONS <i>Majed Abdouli, Bruno Sadeg, Laurent Amanton and A. Berred</i>	233
EFFICIENT QUERYING OF TRANSFORMED XML DOCUMENTS <i>Sven Groppe, Stefan Böttcher and Georg Birkenheuer</i>	241
F2/XML: MANAGING XML DOCUMENT SCHEMA EVOLUTION <i>Lina Al-Jadir and Fatmé El-Moukaddem</i>	251
ACCESS MODEL IN COOPERATIVE INFORMATION SYSTEMS <i>Eric Disson and Danielle Boulanger</i>	259
A TRANSACTION MODEL FOR LONG RUNNING BUSINESS PROCESSES <i>Jinling Wang, Beibong Jin and Jing Li</i>	267
NEW FAST ALGORITHM FOR INCREMENTAL MINING OF ASSOCIATION RULES <i>Yasser El-Sonbaty and Rasha Kashef</i>	275
IMPROVING QUERY PERFORMANCE ON OLAP-DATA USING ENHANCED MULTIDIMENSIONAL INDICES <i>Yaokai Feng, Akifumi Makinouchi and Hiroshi Ryu</i>	282
TRANSACTION CONCEPTS FOR SUPPORTING CHANGES IN DATA WAREHOUSES <i>Bartosz Bębel, Zbyszek Królikowski, Tadeusz Morzy and Robert Wrzemeł</i>	290
ADVANTAGES OF UML FOR MULTIDIMENSIONAL MODELING <i>Sergio Luján-Mora, Juan Trujillo and Panos Vassiliadis</i>	298
DURATIVE EVENTS IN ACTIVE DATABASES <i>Rodolfo Gómez and Juan Carlos Augusto</i>	306
AN EVENT PROCESSING SYSTEM FOR RULE-BASED COMPONENT INTEGRATION <i>Susan D. Urban, Sunitha Kambhampati, Suzanne W. Dietrich, Ying Jin and Amy Sundermier</i>	312
CORRELATING EVENTS FOR MONITORING BUSINESS PROCESSES <i>Josef Schiefer and Carolyn McGregor</i>	320
A TRANSACTIONAL MULTIMODE MODEL TO HANDLE OVERLOAD IN DISTRIBUTED RTDBSS <i>Samia Saad-Bouzeffrane and Sofiane Bourenane</i>	328
THE CONCEPT AND IMPLEMENTATION OF THE MARKET PLACE E-UTILITIES.COM <i>Jamil Dimassi, Carine Souveyet and Colette Rolland</i>	337

BUSINESS MODELLING THROUGH ROADMAPS <i>Judith Barrios Albornoz and Jonás Montilva Calderón</i>	348
APPLYING CROSS-TOPIC RELATIONSHIPS TO INCREMENTAL RELEVANCE FEEDBACK <i>Terry C. H. Lai, Stephen C. F. Chan and Korris F. L. Chung</i>	356
STUDY OF DIFFERENT APPROACHES TO THE INTEGRATION OF SPATIAL XML WEB RESOURCES <i>Jose Eduardo Corroles and Pascual Gonzalez</i>	364
RAPID XML DATABASE APPLICATION DEVELOPMENT <i>Albrecht Schmidt and Kjetil Norvag</i>	370
RELATIONAL SAMPLING FOR DATA QUALITY AUDITING AND DECISION SUPPORT <i>Bruno Cortes and José Nuno Oliveira</i>	376
ASSESSING EFFORT PREDICTION MODELS FOR CORRECTIVE SOFTWARE MAINTENANCE - AN EMPIRICAL STUDY <i>Andrea De Lucia, Eugenio Pompella and Silvio Stefanucci</i>	383
IDENTIFYING CLONES IN DYNAMIC WEB SITES USING SIMILARITY THRESHOLDS <i>Andrea De Lucia, Giuseppe Scanniello, and Genoveffa Tortora</i>	391
SUPPORTING KNOWLEDGE REUSE DURING THE SOFTWARE MAINTENANCE PROCESS THROUGH AGENTS <i>Aurora Vizcaino, Juan Pablo Soto and Mario Piattini</i>	397
AN EXCHANGE SERVICE FOR FINANCIAL MARKETS <i>Hairong Yu, Fethi Rabhi and Feras Dabous</i>	403
ATTENUATING THE EFFECT OF DATA ABNORMALITIES ON DATA WAREHOUSES <i>Anália Lourenço and Orlando Belo</i>	411
DESIGN AND REPRESENTATION OF THE TIME DIMENSION IN ENTERPRISE DATA WAREHOUSES - A BUSINESS RELATED PRACTICAL APPROACH <i>Ahmed Hezqah and A. Min Tjoa</i>	416
SCHEMA EVOLUTION FOR STARS AND SNOWFLAKES <i>Christian Kaas, Torben Bach Pedersen and Bjørn Rasmussen</i>	425
FUZZY MULTIPLE-LEVEL SEQUENTIAL PATTERNS DISCOVERY FROM CUSTOMER TRANSACTION DATABASES <i>An Chen and Huilin Ye</i>	434
XRM: AN XML-BASED LANGUAGE FOR RULE MINING SYSTEMS <i>Béatrice Boucbou, Ahmed Cheriat, Mirian Halfeld Ferrari Alves, Tao-Yuan Jen and Dominique Laurent</i>	441
A CONCEPTUAL FRAMEWORK FOR FORECASTING ERP IMPLEMENTATION SUCCESS - A FIRST STEP TOWARDS THE CREATION OF AN IMPLEMENTATION SUPPORT TOOL <i>Joban Magnusson, Andreas Nilsson and Fredrik Carlsson</i>	447
MANAGING INFORMATION FLOW DYNAMICS WITH AGILE ENTERPRISE ARCHITECTURES <i>Nancy Alexopoulou, Panagiotis Kanellis and Drăăoulis Martakos</i>	454



A FRAMEWORK FOR EVALUATING DIFFICULTIES IN ERP IMPLEMENTATION <i>Luis Ferrario and Jorge Marcelo Montagna</i>	460
UNDERSTANDING THE ERP POST-IMPLEMENTATION DISCOURSE <i>David Sammon, Frederic Adam and Fergal Carton</i>	466
INFORMATION INVASION IN ENTERPRISE SYSTEMS: MODELLING, SIMULATING AND ANALYSING SYSTEM-LEVEL INFORMATION PROPAGATION <i>Peter Henderson, Stephen Crouch and Robert Walters</i>	473
A/D CASE: A NEW HEART FOR FD3 <i>Ángel Mora, M. Enciso, P. Cordero, I. Pérez de Guzmán and J. Guerrero</i>	482
A RECONFIGURATION ALGORITHM FOR DISTRIBUTED COMPUTER NETWORKS <i>Chanan Glezter and Moshe Zviran</i>	491
BVA+ - A BIT VECTORS ALGORITHM FOR ACCELERATING QUERIES IN MULTILEVEL SECURE DATABASES <i>Ramzi Haraty and Arda Zeitunlian</i>	495
RETRO-DYNAMICS AND E-BUSINESS MODEL APPLICATION FOR DISTRIBUTED DATA MINING USING MOBILE AGENTS <i>Ezendu Ifeanyi Ariwa, Mohamed B. Senousy and Mohamed M. Medbat</i>	500
ACQUIRING AND INTEGRATING EXTERNAL DATA INTO DATA WAREHOUSES: ARE YOU FAMILIAR WITH THE MOST COMMON PRECESS? <i>Mattias Strand, Benkt Wangler and Carl-Fredrik Laurén</i>	508
VIRTUAL ORGANIZATIONS AND DATABASE ACCESS - A CASE STUDY <i>Mikko Pitkanen, Marko Niinimäki, John White and Tapio Niemi</i>	514
REASONS FOR ERP ACQUISITION <i>Petri Hallikainen, Sanna Laukkanen and Sami Sarpola</i>	518
A DATA WAREHOUSE ARCHITECTURE FOR BRAZILIAN SCIENCE AND TECHNOLOGY ENVIRONMENT <i>Andre Luis Menolli and Maria Madalena Dias</i>	522
SOFTWARE PRODUCT LINE ANALYSIS OF ENTERPRISE INFORMATION SYSTEM <i>Fabeem Ahmed and Luiz Fernando Capretz</i>	526
AN AUTOMATION SYSTEM BASED ON LABVIEW TO CONTROL THE TEST OF MECHANICAL FLOW METERS: MECHANISM TO CHARACTERIZE FLOW MEASURERS <i>Javier Martínez, Ricardo Alvarez, Petronilo Cortez, Víctor Mejía and Víctor Silva</i>	530
AUDIOVISUAL ARCHIVE WITH MPEG-7 VIDEO DESCRIPTION AND XML DATABASE <i>Pedro Almeida, Joaquim Arnaldo Martins, Joaquim Sousa Pinto and Helder Troca Zagalo</i>	536
USING IUCLID FOR WORLDWIDE EXCHANGE OF CHEMICAL AND TOXICOLOGICAL INFORMATION <i>Stefan Scheer and Remi Allanou</i>	541
CACHING STRATEGIES FOR MOBILE DATABASES <i>Heloise Manica and Murilo S. de Camargo</i>	545

COMPARISON OF APPROACHES IN DATA WAREHOUSE DEVELOPMENT IN FINANCIAL SERVICES AND HIGHER EDUCATION <i>Janis Benefelds and Laila Niedrite</i>	552
AN OBJECT ORIENTED APPROACH FOR DOCUMENT MANAGEMENT <i>Souheil Khaddaj</i>	558
A DATA WAREHOUSE FOR WEATHER INFORMATION: A PATTERN RECOGNITION SOLUTION FOR CLIMATIC CONDITIONS IN MÉXICO <i>José Torres Jimenez and Jesús Flores Gómez</i>	562
WISH QUERY COMPOSER <i>Vivien Liang and Gregory Butler</i>	566
TURNING INFORMATION INTO ACTIONS: FROM DATA TO BUSINESS PROCESSES THROUGH WEB SERVICES <i>Yousef Baghdadi</i>	570
MANAGING WEB-BASED INFORMATION <i>Marco Scotto, Tullio Vernazza, Alberto Sillitti and Giancarlo Succi</i>	575
SEMI-STRUCTURED INFORMATION WAREHOUSES: REQUIREMENTS AND DEFINITION <i>Juan Manuel Pérez, Rafael Berlanga and Maria Jose Aramburu</i>	579
MINING CLICKSTREAM-BASED DATA CUBES <i>Ronnie Alves and Orlando Belo</i>	583
RJDBC: A SIMPLE DATABASE REPLICATION ENGINE <i>Javier Esparza Peidro, Francesc Muñoz-Escó, Luis Irún-Brixi and Josep Bernabéu-Aubán</i>	587
SOLVING INTEROPERABILITY PROBLEMS ON A FEDERATION OF SOFTWARE PROCESS SYSTEMS <i>Mohamed Ahmed-Nacer and Med-Amine Mostefai</i>	591
MODEL BASED MIDDLEWARE INTEGRATION <i>Frédéric Seyler and Philippe Amorté</i>	595
REAL-TIME DATABASES FOR SENSOR NETWORKS <i>Pedro Fernandes Ribeiro Neto, Maria Lígia Barbosa Perkusich and Angelo Perkusich</i>	599
A FRAMEWORK FOR ON-DEMAND INTEGRATION OF ENTERPRISE DATA SOURCES <i>Matti Heikkurinen, Tapio Niemi, Marko Niinimäki and Vesa Sivunen</i>	604
MEASURING THE IMPACT OF ENTERPRISE SYSTEMS ON BUSINESS OBJECTIVES <i>Donald Chand, George Hachey, James Hunton, Vincent Owoso and Sri Vasudevan</i>	609
INFOFLEX: FLEXIBLE AND DISTRIBUTED CONTENT MANAGEMENT - USING WEB SERVICES AND SEMANTIC WEB TO MANAGE CONTENT <i>Jesús Villamor-Lugo, Norberto Fernández-García, Luis Sánchez-Fernández, Jesús Arias-Fisteus, Tomás Nogales-Flores, Antonio Hernández-Pérez and David Rodríguez-Mateos</i>	613
INFORMATION SYSTEM FOR SUPPORTING THE INCLUSION OF JOB SEEKERS TO THE LABOUR MARKET. <i>Paraskevas Hadjidiakos, Christos Skourlas and Theodoros Alevizos</i>	617

---

COMPONENT BASED INFORMATION SYSTEM RE-ENGINEERING APPROACH <i>Abdelaziz Khadraoui and Michel Léonard</i>	625
ADDING SPATIAL COMPONENTS TO SCIENTIFIC DATA WAREHOUSES <i>Khaled K. Deeb, Susan Molina and Pam Lockett</i>	629
INCREMENTAL DATA QUALITY IN THE DATA WAREHOUSE <i>Karsten Boye Rasmussen</i>	634
OBTAINING E-R DIAGRAMS SEMI-AUTOMATICALLY FROM NATURAL LANGUAGE SPECIFICATIONS <i>Farid Meziane and Sunil Vadera</i>	638
DATA EXTRACTION AND TRANSFORMATION WITH FLAT FILE FOR BUSINESS INTEGRATION <i>Sheng Ye, Wei Sun and Zbong Tian</i>	643

# SUPPORTING KNOWLEDGE REUSE DURING THE SOFTWARE MAINTENANCE PROCESS THROUGH AGENTS

Aurora Vizcaino, Juan Pablo Soto, Mario Piattini

*Alarcos Research Group, Computer Science Department, Universidad de Castilla-La Mancha, Ciudad Real, Spain*

*Email: { aurora.vizcaino|juamp.soto|mario.piattini}@uclm.es*

**Keywords:** Knowledge management, agents, software maintenance, software engineering

**Abstract:** Knowledge management has become an important topic as organisations wish to take advantage of the information that they produce and that can be brought to bear on important decisions. This work describes a system to manage and reuse the information (and knowledge) generated during the software maintenance process, which consumes a large part of the software lifecycle costs. The architecture of the system is formed of a set of agent communities. Each community manages different types of knowledge. The communities' agents have the goal of encouraging the reuse of good solutions and taking advantage of information obtained from previous experience. In consequence, the software maintenance is made easier and there are less costs and effort. To achieve this goal, agents use several reasoning techniques such as case based reasoning or decision tree based algorithms which allow them to generate new knowledge from the information that they manage.

## 1 INTRODUCTION

Software engineering in general, and software maintenance in particular, are activities that generate important amounts of knowledge. This knowledge comes not only from the expertise of the professionals involved in the processes, but is also intrinsic to the product being maintained and in the case of software maintenance, to the reasons that motivate maintenance (new requirements, user complaints, etc.), processes, methodologies and tools used in the organization. Moreover, software maintenance is a constantly changing process since maintenance results from the necessity of adapting software systems to an ever changing environment (Oliveira et al, 2003).

On the other hand, many people are involved in software development and maintenance. These people often work in different phases, activities and projects and nowadays it is common that they act from geographically distributed sub-units. For all these reasons, maintenance organizations frequently have problems identifying their resources, localizations and use of knowledge. As a consequence, companies recurrently spend time, effort and money searching for solutions to problems

that have already been solved in their own organization.

On many occasions, organizations had documents or people with the information or knowledge necessary to support or help other colleagues in their activities but either the former did not know what the latter was working on or the latter did not know that other documents or people could have helped them.

Techniques and tools are needed to help software practitioners apply past knowledge to current projects (Henninger, 2003).

A plausible technique is to store good solutions to problems or lessons learned thus avoiding repeating mistakes and increasing productivity and the likelihood of further success (Rus and Lindvall, 2002).

To implement this technique, we used the experience-based approach, which proposes that software maintenance draws on past experiences as a resource for planning and executing software development and maintenance efforts (Basili and Rombach, 1988; Henninger et al. 1995).

An experience-based approach to software maintenance involves using an organization's accumulated knowledge of the development and maintenance processes and application domains as the basis for planning and performing the different

types of maintenance. Analysing and structuring the necessary knowledge to achieve this goal is a difficult process that can only be accomplished in well-understood domains (Fischer and Lemke, 1988).

First of all, the experience-based knowledge lifecycle should be considered: Knowledge creation is a spiral where new ideas are built on existing knowledge, made explicit so it can be communicated to others (these are the lessons learned or experience packages), then routinized to become part of everyday practices that serve as the basis for future knowledge creation (Nonaka and Takeyuchi, 1995). According to this definition, a new problem arises: how to communicate or share knowledge and to foster its reuse and decide who should be in charge of it.

Basili et al. (1994) propose a solution to this problem «the Experience Factory approach». This approach separates the responsibilities of developing projects or maintaining them, (in the case of software maintenance), from capturing experience. The Experience Factory unit is in charge of developing, updating and providing reusable experience that can be utilized by product development teams (Henninger, 2003).

This approach is currently starting to be used in experience management tools (see Seaman et al., 2003) and it is that which is used in our work since it makes knowledge management possible without overloading maintainers with new tasks or responsibilities. Therefore, it is supposed that organizations have an experience factory to carry out all activities necessary to store, manage and share previous experience.

Besides using a software experience based tool we consider how to deal with the different types of knowledge generated during the software maintenance process. Agents were the solution chosen because they can specialize in monitoring specific knowledge. Another advantage of using agents is that they can take advantage of other agents' knowledge by consulting or asking for help from others. Therefore, they reuse and share their own knowledge.

The rest of the paper is structured as follows: Section two describes what type of knowledge should be taken into account to develop an experience-based knowledge management tool for the software maintenance process. Section three is focused on describing the multi-agent architecture, designed to foster knowledge reuse in software maintenance companies. Finally, conclusions are outlined.

## 2 SOFTWARE MAINTENANCE KNOWLEDGE

There are several proposals of mental models to describe how software engineers go about carrying out maintenance (Rugaber and Tisdale, 2000; Briand et al, 1994). However, these works focus on the process of doing maintenance rather than on the knowledge generated or used during this process.

Kitchenham et al (1999) designed an ontology of software maintenance. In this ontology all the concepts relevant to the classification of empirical studies in software maintenance were identified.

Kitchenham's ontology is structured in several partial subontologies:

**Products ontology:** This represents how the software product is maintained and how it evolves over time.

**Activities ontology:** This describes how to organise activities for maintaining software and what kinds of activities they may be.

**Processes ontology:** This is divided into two different focuses, defining a sub-ontology for each one:

- **Procedures sub-ontology:** This defines how the methods, techniques and tools can be applied to the activities and how the resources are used in order to carry out these activities.

- **Process Organization sub-ontology:** This focuses on how the support and organizational processes are related to the software maintenance activities, how the maintainer is organized, and what his/her contractual obligations are.

**Peopleware ontology:** This describes what skills and roles are necessary in order to carry out the activities, what the responsibilities of each person are, and how the organizations that intervene in the process (maintainer, customer and user) relate to each other.

Oliveira et al. (2003) present an ontology where the knowledge useful to software maintenance is determined. Their ontology is inspired by Kitchenham's ontology. They propose five aspects instead of the four described above, although four of them are similar to the sub-ontologies previously cited. The aspects considered by Oliveira et al (2003) are: Knowledge about the software system itself which corresponds to the product ontology. Knowledge about the maintainer's skills, which corresponds to the peopleware ontology. Knowledge about the maintenance activity which corresponds to the activities ontology. Knowledge about the organization structure which corresponds to the Process Organization sub-ontology. And knowledge about the application domain which is not considered in Kitchenham's ontology.

Ruiz et al. (2003) propose a semi-formalised ontology where Kitchenham's ontology has been extended and focused on the management of Software Maintenance Projects. This is the ontology that has been used in the design of our experience based tool since it is that which is best adapted to our necessities in exactly defining the software maintenance projects domain.

Our experience-based tool is currently focused on knowledge directly related to the maintenance problems. Therefore, storing the application domain was not considered convenient, at least in the first step. Moreover, it is more likely that organizations obtain experience about what activities are most performed, or about the processes that should be followed to carry them out than about the application domain itself.

Therefore, the tool manages information related to the products to be maintained, the activities that are performed during the software maintenance process, and of course, the methods, techniques and tools used to carry out the different activities. Moreover, the tool monitors the work that each person has done and in which project and activity s/he is working at this moment. Thus, different kinds of knowledge should be taken into account and it is for this reason that we have designed a multiagent architecture.

### 3 THE MULTI-AGENT ARCHITECTURE

There are several reasons why agents are recommendable for managing knowledge (see Tacla and Barthès, 2002). First of all, agents are proactive. This means they act automatically when it is necessary. Moreover, agents can manage both distribute and local information. This is an important feature since the software maintenance information is generated by different sources and often from different places.

Another important issue is that agents can learn from their own experience. Consequently, the system is expected to become more efficient with time since the agents have learnt from their previous mistakes and successes.

On the other hand, each agent may utilize different reasoning techniques depending on the situation. For instance, they can use ID3 algorithms to learn from previous experiences and use case-based reasoning to advise a client how to solve a problem.

Having explained the convenience of using agents let us describe the multi-agent architecture. We followed MESSAGE, a Methodology for

Engineering Systems of Software Agents (Evan et al., 2001) to design the architecture.

MESSAGE proposes different levels of analysis. At level 0 the system to be developed is considered as a black box focusing on its relationships with the entities in its environment (eg. users, stakeholders, and resources).

Figure 1 shows the level 0 of our design, where there are three entities: the experience based tool, the maintainers' team and the experience factory organization. As Figure 1 indicates the experience based tool is updated by the members of the experience factory. However, they need to obtain experience from the maintainers' teams. This means that the activities of the experience factory and those of the maintainers' team should be perfectly integrated (Rus and Lindvall, 2002). A feedback between them is indispensable to assure the success of the experience factory approach.

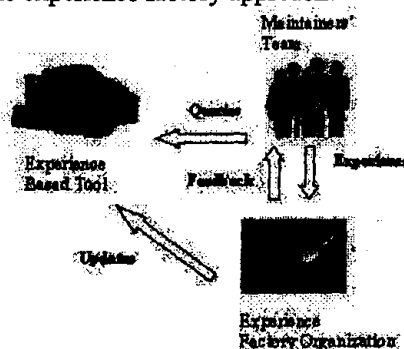


Figure 1: Organisation Diagram

Moving from level 0 to level 1, analysis focuses on the system itself, identifying the types of agents and roles. The tool has different types of agents. They are groups in three communities. The *product community* is formed of product agents in charge of monitoring information related to the products to be maintained. The *activity community* has activity agents, which control all information, related to a specific activity such as the process where it is used, the tool/s necessary to perform the activity and the best methods to carry it out.

The third community is called the *peopleware community*. This community has three different agents, one per type of profile involved in the software maintenance process (Polo et al., 1999). One is the "staff agent" in charge of managing information related to the members of the staff. Another type of agent, called client agent, is in charge of the information received from the clients and of their data. And the last agent, the user agent, manages users' information. Following the MESSAGE methodology we have developed an Agent/Role schema for each agent, which as its

name suggests, describes the features and roles of each agent. Following the product agent/role schema is presented:

Table 1: Product agent/role schema

Role Schema	Product Agent
Goals	Predicting future changes. Looking for similar features in other products.
Capability	Case-Based reasoning
Knowledge	Initial requirements of the product. Product's features. Changes performed in the product.
Agent requirements	This role is played by the agent that each product has.

Table 1 summarizes the fact that by using case-based reasoning the product agents try to predict future changes, since similar software projects often require similar maintenance demands. This role is very relevant as studies show that the incorporation of new requirements is the core problem for software evolution and maintenance and supposes, along with the adaptive maintenance, around 75% of the maintenance effort. As Bennet and Rajlich (2000) claim, if changes can be anticipated they can be built in by some form of parameterisation. In this way costs and efforts are decreased.

The activity agent/role schema is now shown and commented on.

Table 2: Activity agent/role schema

Role Schema	Activity Agent
Goals	To advise the best way to perform an activity.
Capability	Induction and decision trees based algorithms to learn from previous experience.
Knowledge	Methods, techniques and resources to use for performing an activity. Lessons learned.
Agent requirements	This role is played by the agent that represents each activity.

In order to carry out suitable maintenance it is advisable to follow a specific methodology. In our case MANTEMA (Polo et al., 1999), a complete methodology designed for software maintenance, is used.

When an organization uses our tool for the first time, the activity agents contain MANTEMA's indications about when to use an activity, or what methods and resources to use. However, while the tool is used agents are learning what techniques are the most appropriate for each activity and also learning which mistakes are often made in each activity. Thus, the more the tool is used the better it

will work. With this role the aim is to reuse lessons learned and avoid the repetition of mistakes.

The following paragraphs describe the agent/role schema for the agents belonging to the peopleware community. They are the staff agent, the client agent and the user agent.

The staff agent is in charge of monitoring the employees' work in order to determine in which task each person has more experience or where a person obtained better performance. Therefore, the staff agent has enough information to be able to recommend the most suitable person to perform a task attempting to decrease time, cost or effort or to obtain the best performance.

Table 3: Staff agent/role schema

Role Schema	Staff Agent
Goals	To follow the performance of each employee in order to recommend the most suitable person to carry out a task.
Capability	Statistics techniques that indicate the time that an employee took to perform a task or calculate the performance graph of each member.
Knowledge	Personal data of the employees, in which activities they have worked, and which product they have maintained.
Agent requirements	This role is played by one agent in charge of all the members of the staff.

On the other hand, as was mentioned before, similar products often demand similar changes. The same often happens with the clients. Clients with frequent analogous features have similar needs. Thus, the client agent searches for analogies among clients in order to predict future demands or to use the knowledge obtained from previous experience to help clients to make a decision.

When more knowledge and experience is managed it is easier to identify problems, to develop different alternative solutions and to select the best option (Gnyawali et al., 1997).

For example, let us consider that a client wants to change two modules of the same product. However, he wonders whether it is more suitable to carry out the two changes at the same time or order one change first, and after a time request the second change. The client agent can check whether similar changes were demanded previously and calculate statistics in order to advise him/her which method is most suitable to follow in order to obtain the best performance and price.

Table 4: Client agent/role schema

Role Schema	Client Agent
Goals	To help to make decisions.
Capability	Analogy reasoning techniques.
Knowledge	Profile of each client and their requirements (including the initial requirements if they are available).
Agent requirements	This role is played by one agent in charge of monitoring clients' demands.

Finally, the user agent schema shows that the user agent plays a role similar to that of the client agent. The reason for having two different agents is that the clients are frequently not the users of the software to be maintained. For this reason it is necessary to monitor the information of both parts. For a software maintenance organization it is very useful to know the users' opinion of the software and of the changes that have been performed. Organizations can use this information to evaluate their work and to study how the users' characteristics influence the maintenance of the product. In order to illustrate how the user agent works let us imagine that an accounting department requests a change in its software because a new tax has appeared.

Table 5: User agent/role schema

Role Schema	User Agent
Goals	To predict new requirements
Capability	Analogy reasoning techniques
Knowledge	Necessities of the users of each product, their background and also their complaints and comments about the products.
Agent requirements	This role is played by one agent in charge of monitoring users' features.

The user agent sends an email to other users, whose jobs are related to accounting, warning them of the possibility that their software should be modified and updated because of the new tax. A budget of the cost of the change could even be attached to the email. Thus, users can plan the changes in advance.

To conclude this section some considerations related to the implementation of the system are explained. The platform chosen to implement the multiagent system is JADE which is an FIPA compliant agent platform (Bellifemine et al., 2001), implemented in Java and developed as an open source project.

This platform provides a Java API which simplifies the development of agents that run in the

environment of the platform. The language used for the agents' communication is ACL.

Moreover, the experience and information managed by the system are represented in the experience repository as XML documents which are managed by TAMINO, a database created especially for XML documents.

## 4 CONCLUSIONS

Software maintenance is one of the most important stages of the software life cycle. This process involves a lot of time, effort, and costs. It also generates a huge amount of different kinds of knowledge that must be suitably managed. This fact is more visible in big companies since the larger the product the more likely it is that product knowledge will be spread among the maintenance staff, making it more difficult to find the cause of problems. Furthermore, the more people working together the more opportunities there are for misunderstandings that may lead to quality problems.

This paper presents a multiagent system, based on the experience-based approach, which stores information and generates knowledge with the finality of encouraging the reuse of previous information and knowledge in software maintenance organizations. Thus costs and effort are decreased.

## ACKNOWLEDGEMENTS

This work is partially supported by the TAMANSI project (grant number PBC-02-001) financed by the Consejería de Ciencia y Tecnología of the Junta de Comunidades de Castilla-La Mancha and the MAS project (grant number TIC2003-02737-C02-02, Ministerio de Ciencia y Tecnología, SPAIN).

## REFERENCES

- Basili, V. R., Caldiera, G., and Rombach, H. D. (1994). The Experience Factory. *Encyclopedia of Software Engineering* (pp. 469-476). Marciniak, J.J.; Wiley, J. (Eds.).
- Basili, V. R., and Rombach, H.D. (1988) The TAME Project: Towards Improvement-Oriented Software Environments. *IEEE Transactions on Software Engineering*, 14 (6), pp 758-773.
- Bellifemine, A., Poggi, G., and Rimassa, G. (2001). Developing multi agent systems with a FIPA-



- compliant agent framework. *Software Practise & Experience*, 31: 103-128.
- Bennet K.H., and Rajlich V.T.(2000). Software Maintenance and Evolution: a Roadmap, in Finkelstein, A. (Ed.), *The Future of Software Engineering*, ICSE 2000, June 4-11, Limerick, Ireland, pp 75-87.
- Briand, L. C., Basili, V., Kim, Y., Squier, D. R. (1994). A Change Analysis Process to Characterize Software Maintenance Projects. In Proc. of The International Conference on Software Maintenance. ICSM'94, pp. 38-49, September 1994, Victoria, British Columbia, Canada.
- Evans, R., Kearney, P., Stara, J., Caire, G., Garijo, F.J., Gomez Sanz, J.J., Pavon, J., Leal, F., Chainho, P., Massonet, P. (2001). MESSAGE: Methodology for Engineering Systems of Software Agents. <http://www.eurescom.de/~pub-deliverables/P900-series/P907/TI2/p907ti2.pdf>. Consulted on 6th August 2003.
- Fischer, G., Lemke, A.C., (1988). Construction Kits and Design Environments: Steps Toward Human Problem-Domain Communications. *Human Computer Interaction*, 3 (3), pp 179-222.
- Gnyawali, D.R., Stewart, A.C., and Grant J.H. (1997). Creating and Utilization of Organizational Knowledge: An Empirical Study of the Roles of Organizational Learning on Strategic Decision Making. *Academy of Management Best Paper Proceedings*, pp. 16-20.
- Henninger, S. (2003). Tool Support for Experience-Based Software Development Methodologies. To Appear in *Advances in Computer*, 59, 29-82.
- Henninger, S. (1995) Supporting the Domain Lifecycle. IEE Seventh International Workshop on Computer-Aided Software Engineering-CASE'95, Toronto, Canada. IEEE Computer Society Press, pp 10-19.
- Kitchenham, B.A., Travassos, G.H., Mayrhauser, A., Niessink, F., Schneidewind, N.F., Singer, J., Takada, S., Vehvilainen, R. and Yang, H. (1999). Towards an Ontology of Software Maintenance. *Journal of Software Maintenance: Research and Practice*. 11, pp. 365-389.
- Nonaka, I., and Takeuchi, H. (1995). *The Knowledge-Creation Company: How Hapanese Companies Create the Dynamics of Innovation*. Oxford Univ. Press, New York
- Oliveira, K. M., Anquetil, N., Dias M.G, Ramal, M., & Meneses, R. (2003). Knowledge for Software Maintenance. Fifteenth International Conf. on Software Engineering and Knowledge Engineering (SEKE'03) 61-68
- Polo, M., Piattini, M., Ruiz, F., and Caléro, C. (1999): MANTEMA: A complete rigorous methodology for supporting maintenance based on the ISO/IEC 12207 Standard. *Euromicro Conf. on Software Maintenance and Reengineering (CSMR'99)*. Amsterdam (Netherland). IEEE Computer Society, , pp. 178-181.
- Rugaber, S., and Tisdale, V.G. (1992). *Software Psychology Requirements for Software Maintenance Activities*. Software Engineering Research Center, Georgia Institute of Technology.
- Ruiz, F., Vizcaíno, A., Piattini, M. y García, F. (2003). An Ontology for the Management of Software Maintenance Projects. Sent to the International Journal of Software Engineering and Knowledge Engineering.
- Rus, I., and Lindvall, M. (2002). Knowledge Management in Software Engineering. *IEEE Software*, May/June, 26-38.
- Seaman, C., Mendonca, M. G., Basili, V. R., and Kim, Y-M. (2003). User Interface Evaluation and Empirically-Based Evolution of a Prototype Experience Management Tool. *IEEE Transactions on Software Engineering*, Vol. 29, No. 9.
- Tacla, C., and Barthès, J-P. (2002). A Multi-Agent Architecture for Knowledge Management System. Second IEEE International Symposium on Advanced Distributed Computing Systems. ISADS.